





 $100 \mu I \\ \text{minimum reaction volume}$ 







Probe carryover less than

0.05%

# **BS-230**

# Clinical Chemistry Analyzer



Independent mixing bar



Built-in barcode reader

	Samp	le .	Quality Cost	rol	Stehas				
rognam	ID B	Q	si 1	Pos 2	STAT	Sample Type	Serum 🗸	Status	
	Bor Code			C	connect		~	Patient ID	
Result	SI	Ca	ш	Р	GloH	Gla-G ALP	V48-T	D-84-V	D-66-1
illeagente	T-bit-D	ADA	PA	TBA	ALT		y-GT	Lp(a)	TP
=	CHE	ALB	LIP	e-AMY	ApoA1	April 8	TG	LDL-C	HDL4
<u>~~</u> oc	тс	CREA-S	CREA-J	UA	CysC	UREA	CO2	CK-M8	СК
Usiky	LDH	е-НВОН	FUN	HS-CRP	ASO	RF	C3	C4	>
<u> </u>	Renalpanel								

Intelligent software with user-friendly interface

Other ne Performa 09/11/18 9/36		
09/11/18 9:30		
2009/11/18 9:30		
2009/11/18 9:30		
00/11/18 9:30		
09/11/18 9:30		
09/11/18 9:30		
09/11 09/11 09/11		

Step-by-step maintenance guide



# Compact Size with Robust Functions



## **Complete traceability process**

Complete calibration hierarchy and traceability chain are based on ISO standard (EN/ISO17511) from reference system to routine measurement system.

# External quality assurance for reference measurement

Mindray participates in RELA (External quality control for reference laboratory) and CAP (College of American Pathologists external quality control).

## Traceability chain of Mindray measurement system (Glu)

Traceability Material Calibration / Value Assignment Procedure Implementation Uncertainty Uc(y)

SI unit,mmol/L

Reference material SRM 917C

Mindray Master Calibrator

Mindray Product Calibrator

Routine Sample

Primary Reference measurement procedure

CDC Hexokinase reference method


Mindray standard Measurement system

End user' Routine Mindray

Result


# **EQA for Mindray Reference laboratory——RELA**

Mindray reference laboratory has passed RELA for 6 consecutive years.

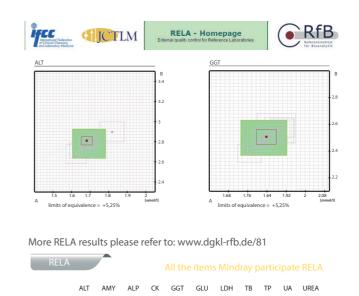

# **EQA for Mindray Testing System—— CAP**

Mindray testing system has passed CAP for 6 consecutive years.



EVALUATION

CAP Number: 7198395-01 Kit# 1
Institution: Shenzhen Mindray Biomed Elec Co Ltd

Attention: Lixing Liu MD City / State: Hongkong HK CH 518055 Kit ID: 25733824 Kit Mailed: 6/3/2013

Original Evaluation: 7/8/2013

C-B 2013 Chemistry

CAP

CAP #: 7198395 Subspecialty: Routine Chemistry												
	Proficiency Event 2012 3			Proficiency Event 2013 1			Proficiency Event 2013 2			Current Event	Cumulative CLIA	
Regulated Analyte	Test Event	Score	%	Test Event	Score %		Test Event	Score	%	Performance Interpretation	'88 Performance Interpretation	
ALT	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Albumin	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Alkaline Phosphatase	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Amylase	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
AST	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Bilirubin, Total	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Calcium, Total	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Chloride	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Cholesterol, Total	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Cholesterol, HDL	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Creatine Kinase	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Creatinine	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Glucose	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Iron, Total	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
LD	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Magnesium	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Potassium	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Sodium	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Protein, Total	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Triglycerides	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Urea Nitrogen	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	
Uric Acid	C-C	5/5	100	C-A	5/5	100	C-B	5/5	100	Satisfactory	Successful	

## Reagent menu

#### **Hepatic Panel**

Alanine Aminotransferase (ALT)

Aspartate Aminotransferase (AST)

Alkaline Phosphatase (ALP)

γ-GlutamylTransferase (γ-GT)

Direct Bilirubin (D-Bil) DSA Method

Direct Bilirubin (D-Bil)VOX Method

Total Bilirubin (T-Bil) DSA Method

Total Bilirubin (T-Bil)VOX Method

Total Protein (TP)

Albumin (ALB)

Total Bile Acids (TBA)

Prealbumin (PA)

Cholinesterase (CHE)

α-L-fucosidase (AFU)

5'-nucleotidase (5'-NT)

#### **Renal Panel**

Urea (UREA)

Creatinine (CREA) Modified Jaffé Method

Creatinine (CREA)Sarcosine Oxidase Method

Uric Acid (UA)

Carbon dioxide (CO2)

Microalbumin

β2-Microglobulin (β2-MG)

Cystatin C (CysC)

Retinol binding protein(RBP)

#### Immune Panel

Immunoglobulin A (IgA)

Immunoglobulin G (IgG)

Immunoglobulin M (IgM)

Complement C3 (C3)

Complement C4 (C4)

#### **Diabetes Panel**

Glucose (Glu) GOD-POD Method

Glucose (Glu) HK Method

Hemoglobin A1c (HbA1c)

Fructosamine (FUN)

 $\beta$ -Hydroxybutyrate( $\beta$ -HB)

#### **Cardiac panel**

Creatine Kinase (CK)

Creatine Kinase-MB (CK-MB)

Lactate Dehydrogenase (LDH)

α-Hydroxybutyrate Dehydrogenase(α-HBDH)

High sensitive C-reaction protein( HS-CRP)

#### **Inorganic & Anemia**

Iron (Fe)

Ferritin (FER)

Transferrin (TRF)

Calcium (Ca)

Magnesium (Mg)

Phosphate Inorganic (P)

Unsaturated iron binding capacity (UIBC)

Glucose-6-phosphate dehydrogenase (G6PD)

#### **Lipid Panel**

Total Cholesterol (TC)

Triglycerides (TG)

HDL-Cholesterol (HDL-C)

LDL-Cholesterol (LDL-C)

Apolipoprotein A1 (ApoA1)

Apolipoprotein B (ApoB)

Lipoprotein(a) [Lp(a)]

#### **Rheumatism Panel**

C-reactive protein (CRP)

Rheumatoid Factor (RF)

Antibodies Against Streptolysin O (ASO)

#### **Lung Panel**

Adenosine Deaminase (ADA)

Angiotensin Converting Enzyme(ACE)

#### **Pancreatitis Panel**

 $\alpha$ -Amylase ( $\alpha$ -AMY)

Lipase (LIP)

# **BS-230**

# Clinical Chemistry Analyzer

#### **Technical Specifications**

System function

Automatic, Discrete, Random Access, Bench-top

STAT sample priority

Throughput: Up to 200 tests/hour, up to 400 tests/hour with ISE

Measuring principles: Absorbance photometry, Turbidimetry, Ion

Selective Electrode technology

Methodology: End-point, Fixed-time, Kinetic, optional ISE,

Single/Dual/ reagent chemistries,

monochromatic / bi-chromatic

Original system pack reagent ready to use

Close system and open system is optional

Reagent/Sample Handling

Reagent/Sample tray: 80 positions for reagents and 40 positions

for samples in 24-hour refrigerated

compartment (2~12°C)

Reagent volume:  $10\sim250\mu l$ , step by  $0.5\mu l$ 

Sample volume: 2~45μl, step by 0.1μl

Reagent/Sample probe: Liquid level detection, vertical collision

protection and inventory checking, reagent pre-warming

Probe cleaning: Automatic washing for interior and exterior

Carry over < 0.05%

Automatic sample dilution: Pre-dilution and post-dilution

Internal bar code reader (optional)

Capable to communicate with LIS in bi-directional mode

Reaction System:

Cuvette: 40 disposable cuvettes

Reaction volume: 100~360µl

Operating temperature: 37°C ±0.1°C

ISE Module (optional)

Measuring K+, Na+, Cl-

Mixing Unit

Independent mixing bar

Optical System

Light Source: Halogen-tungsten lamp

Wavelength: 8 wavelengths, 340nm, 405nm, 450nm,

510nm、546nm、578nm、630nm、670nm

Absorption range: 0~4.0 Abs (10mm conversion), resolution

0.0001Abs

Stray Light 5.6Abs

Control and Calibration

Calibration modes: Linear (one point, two points and

multi-points), Logit-Log 4P, Logit-Log 5P, spline, exponential, polynomial, parabola

Control Rules: X-R, L-J, Westgard multi-rule, Cumulative sum

check, twin plot

Operation Unit

Operation system: Windows 8

Interface: RS-232

**Working Conditions** 

Power Supply: 200~240V, 50/60Hz, ≤1000VA or 100~130V,

60Hz, ≤1000VA

Dimension: 690 mm (length) ×580 mm (depth) ×595 mm

(height)

Weight: 47 kg

Water Consumption: ≤ 2 L/H

mindray
are registered trademarks or trademarks owned by Shenzhen Mindray Bio-medical Electronics Co., LTD.
© 2015 Shenzhen Mindray Bio-Medical Electronics Co., Ltd. All rights reserved. Specifications subject to changes without prior notice
P/N: ENG-BS-230-21285x8-20160314

msmedicalservices: P.O. Box KB 607, korlebu,Accra
Tell: +233 20 523 1196 / +233 23 684 8477 / +233 30 700 2538
E-mail: info@msmedicalservices.com www.msmedicalservices.com



# **BS-230**

# Clinical Chemistry Analyzer

#### **Technical Specifications**

System function

Automatic, Discrete, Random Access, Bench-top

STAT sample priority

Throughput: Up to 200 tests/hour, up to 400 tests/hour with ISE

Measuring principles: Absorbance photometry, Turbidimetry, Ion

Selective Electrode technology

Methodology: End-point, Fixed-time, Kinetic, optional ISE,

Single/Dual/ reagent chemistries,

monochromatic / bi-chromatic

Original system pack reagent ready to use

Close system and open system is optional

Reagent/Sample Handling

Reagent/Sample tray: 80 positions for reagents and 40 positions

for samples in 24-hour refrigerated

compartment (2~12°C)

Reagent volume:  $10\sim250\mu l$ , step by  $0.5\mu l$ 

Sample volume: 2~45μl, step by 0.1μl

Reagent/Sample probe: Liquid level detection, vertical collision

protection and inventory checking, reagent pre-warming

Probe cleaning: Automatic washing for interior and exterior

Carry over < 0.05%

Automatic sample dilution: Pre-dilution and post-dilution

Internal bar code reader (optional)

Capable to communicate with LIS in bi-directional mode

Reaction System:

Cuvette: 40 disposable cuvettes

Reaction volume: 100~360µl

Operating temperature: 37°C ±0.1°C

ISE Module (optional)

Measuring K+, Na+, Cl-

Mixing Unit

Independent mixing bar

Optical System

Light Source: Halogen-tungsten lamp

Wavelength: 8 wavelengths, 340nm, 405nm, 450nm,

510nm、546nm、578nm、630nm、670nm

Absorption range: 0~4.0 Abs (10mm conversion), resolution

0.0001Abs

Stray Light 5.6Abs

Control and Calibration

Calibration modes: Linear (one point, two points and

multi-points), Logit-Log 4P, Logit-Log 5P, spline, exponential, polynomial, parabola

Control Rules: X-R, L-J, Westgard multi-rule, Cumulative sum

check, twin plot

Operation Unit

Operation system: Windows 8

Interface: RS-232

**Working Conditions** 

Power Supply: 200~240V, 50/60Hz, ≤1000VA or 100~130V,

60Hz, ≤1000VA

Dimension: 690 mm (length) ×580 mm (depth) ×595 mm

(height)

Weight: 47 kg

Water Consumption: ≤ 2 L/H

mindray
are registered trademarks or trademarks owned by Shenzhen Mindray Bio-medical Electronics Co., LTD.
© 2015 Shenzhen Mindray Bio-Medical Electronics Co., Ltd. All rights reserved. Specifications subject to changes without prior notice
P/N: ENG-BS-230-21285x8-20160314

msmedicalservices: P.O. Box KB 607, korlebu,Accra
Tell: +233 20 523 1196 / +233 23 684 8477 / +233 30 700 2538
E-mail: info@msmedicalservices.com www.msmedicalservices.com

